

# DOUBLE PITCH WITH PLUMB CURB (LONG SPAN)

1/2 FULL SCALE

- o GLASS, INSULATED
- o I-BEAM RAFTER (HL-16)
- o MIN. 4 IN 12 PITCH RECOMMENDED

UNITS REQUIRED

NEOPRENE SETTING BLOCKS AT 1/4 POINTS

.040 ALUM. SETTING BLOCK SUPPORT

#8 X 3/4" LONG HEX HEAD TEK SCREW AT 24" O.C.

#12 X 1 1/4" STAINLESS STEEL SHEET METAL SCREW

WEEP HOLES AT RAFTERS & CORNERS

MODIFIED HL-35 ALUMINUM SILL

FASTENER (BY OTHERS)

STRUCTURAL CURB (BY OTHERS)

O.D. CURB (ON SLOPE DIMENSION)

FORMED ALUM. "SIMPLE RIDGE" CAP (.040 MINIMUM) WITH FASTENERS AS REQUIRED

FLAT BAR RAFTER CAP (BEYOND) WITH CAP SCREWS AT 12" O.C. MAX.

1/8" X 3/8" BUTYL OR FOAM GLAZING TAPE


HL-5 GASKET OR GLAZING TAPE

MODIFIED HL-17

HL-16 MITERED AND WELDED AT RIDGE

SPECIFY PITCH

MASTIC BEDDING TAPE (BY OTHERS)

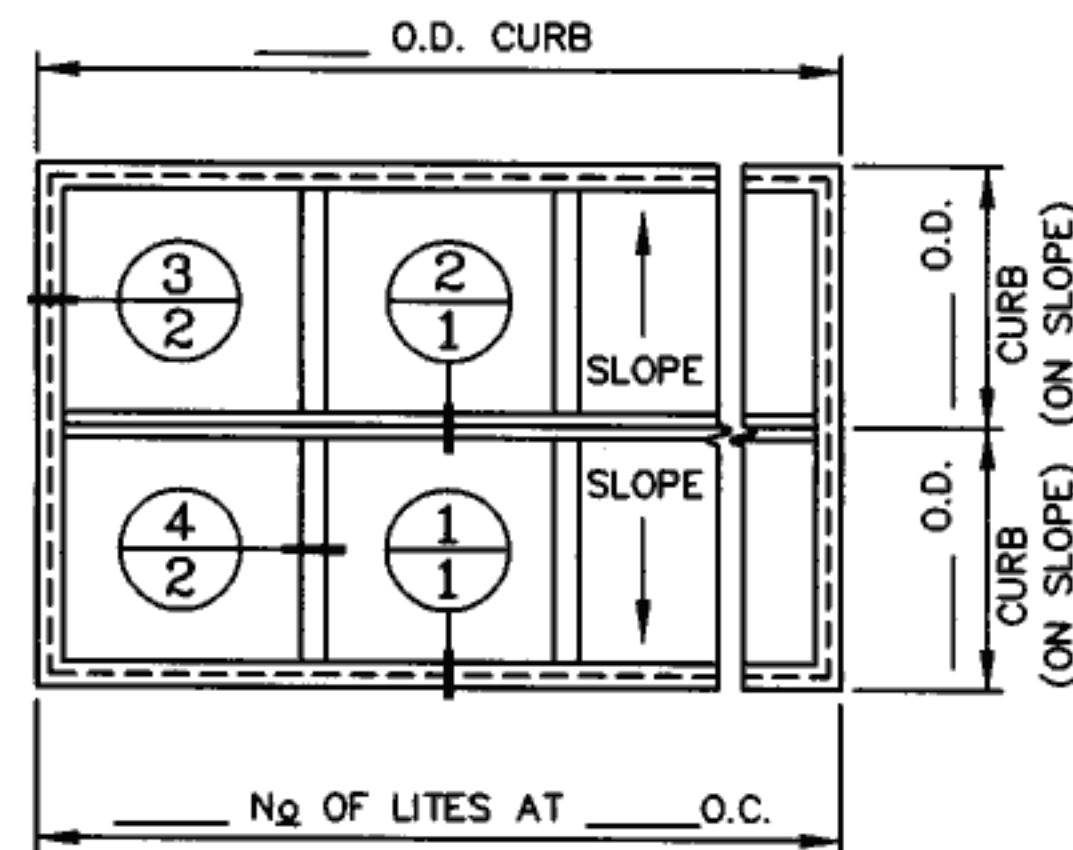

PLAN

FINISH :

GLAZING :

- FIELD GLAZED
- SHOP GLAZED

FIELD MEASUREMENTS AND INSTALLATION BY \_\_\_\_\_

PROJECT :

CUSTOMER :

ARCHITECT :

FILE : HL35DIG1

REVISIONS

**O'KEEFFE'S, INC.**

75 WILLIAMS AVENUE  
SAN FRANCISCO, CA 94124  
TEL.: (415) 822-4222  
FAX: (415) 822-5222

DRAWN :

DATE :

JOB NO.

SHEET : 1 OF 2