

DOUBLE PITCH WITH PLUMB CURB (LONG SPAN)

1/2 FULL SCALE

- o GLASS, INSULATED
- o TUBULAR RAFTER (TB-300) OR (TB-3)
- o MIN. 4 IN 12 PITCH RECOMMENDED

____ UNITS REQUIRED

NEOPRENE SETTING BLOCKS AT 1/4 POINTS

.040 ALUM. SETTING BLOCK SUPPORT

#8 X 3/4" LONG HEX HEAD TEK SCREW AT 24" ON CENTER

#12 X 1 1/4" STAINLESS STEEL SHEET METAL SCREW

WEEP HOLES AT RAFTERS AND CORNERS

HL-35 ALUM. SILL

FASTENER (BY OTHERS)

MATERIAL AND CONSTRUCTION BY OTHERS

O.D. CURB (ON SLOPE DIMENSION)

SPECIFY PITCH

MASTIC BEDDING TAPE (BY OTHERS)

FORMED ALUM. "SIMPLE RIDGE" CAP (.040 MIN.) WITH FASTENERS AS REQUIRED

FLAT BAR RAFTER CAP (BEYOND) WITH CAP SCREWS AT 12" O.C. MAX.

1/8" X 3/8" BUTYL OR FOAM GLAZING TAPE


HL-38 ALUM. RIDGE

WELD TB-300 OR TB-3 AT RIDGE

2
1

1
1

PLAN

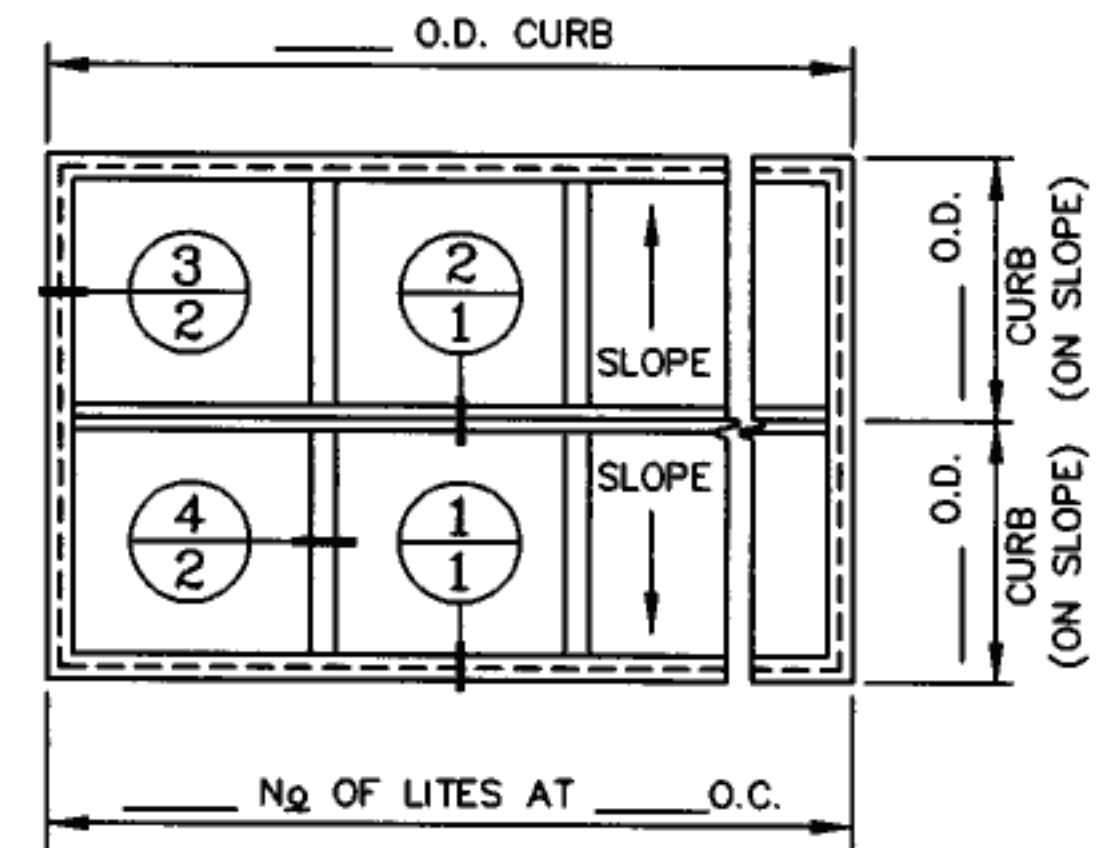

FINISH :

PROJECT :

FILE : HL35DIG3

GLAZING :

CUSTOMER :

REVISIONS

- FIELD GLAZED
- SHOP GLAZED

FIELD MEASUREMENTS AND INSTALLATION BY _____

ARCHITECT :

O'KEEFFE'S, INC.

75 WILLIAMS AVENUE
SAN FRANCISCO, CA 94124
TEL.: (415) 822-4222
FAX: (415) 822-5222

DRAWN :

DATE :

JOB NO.

SHEET : 1 OF 2