

# DOUBLE PITCH WITH PERPENDICULAR CURB (LONG SPAN)

- o GLASS, INSULATED
- o I-BEAM RAFTER (HL-16)
- o MIN. 4 IN 12 PITCH RECOMMENDED

1/2 FULL SCALE

UNITS REQUIRED

NEOPRENE SETTING BLOCKS AT 1/4 POINTS

.040 ALUM. SETTING BLOCK SUPPORT

#8 X 3/4" LONG HEX HEAD TEK SCREW AT 24" ON CENTER

WEEP HOLES

#12 X 1 1/4" STAINLESS STEEL SHEET METAL SCREW

WEEP HOLES AT RAFTERS AND CORNERS (TO LOW SIDE)

HL-35 ALUM. SILL (ALLOY 6063-T5)

FASTENER (BY OTHERS)

MATERIAL AND CONSTRUCTION BY OTHERS

O.D. CURB  
(ON SLOPE DIMENSION)

SPECIFY PITCH

MASTIC BEDDING TAPE (BY OTHERS)

FORMED ALUM. "SIMPLE RIDGE" CAP (.040 MIN.) WITH FASTENERS AS REQUIRED


FLAT BAR RAFTER CAP (BEYOND) WITH CAP SCREWS AT 12" O.C. MAX.

1/8" X 3/8" BUTYL OR FOAM GLAZING TAPE

HL-5 GASKET OR GLAZING TAPE

MODIFIED HL-17

WELD HL-16 AT RIDGE

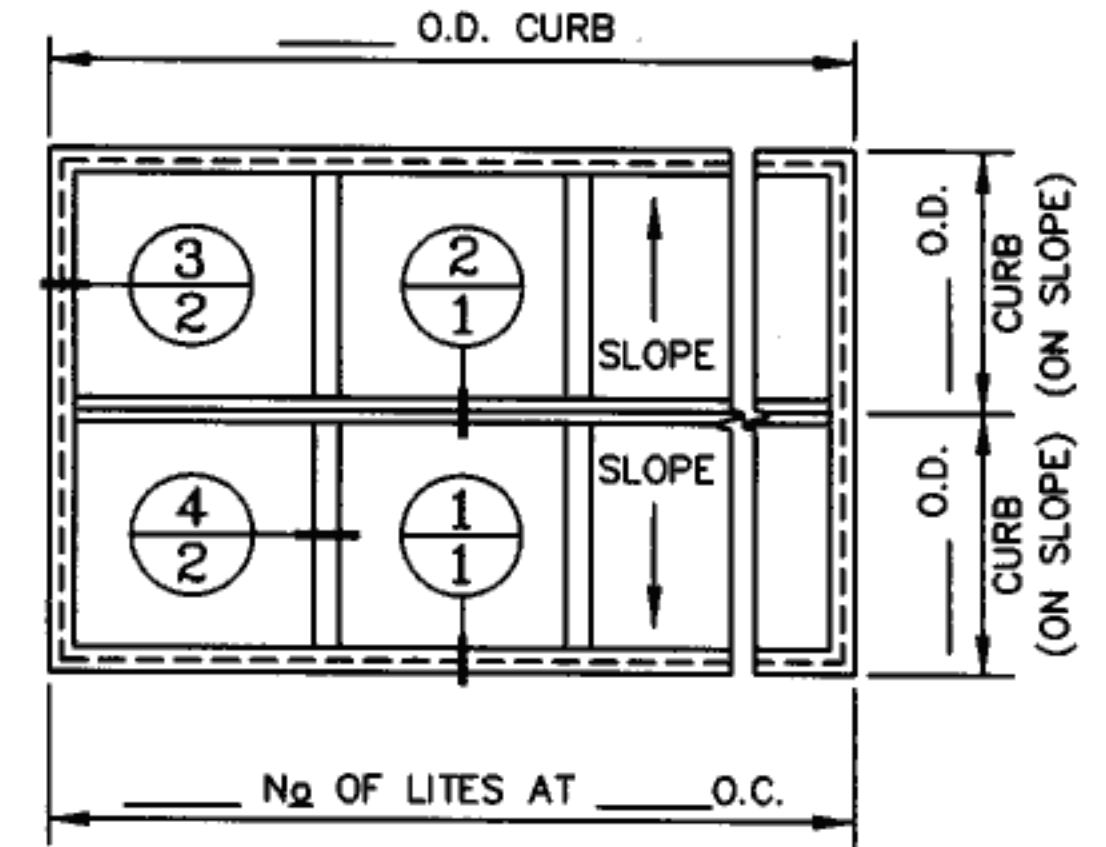

PLAN

FINISH :

PROJECT :

FILE : HL35DIG8

GLAZING :

CUSTOMER :

REVISIONS

FIELD GLAZED      FIELD MEASUREMENTS AND INSTALLATION BY \_\_\_\_\_  
 SHOP GLAZED

ARCHITECT :

**O'KEEFFE'S, INC.**

75 WILLIAMS AVENUE  
 SAN FRANCISCO, CA 94124  
 TEL.: (415) 822-4222  
 FAX: (415) 822-5222

DRAWN :

JOB NO.

DATE :

SHEET : 1 OF 2