

DOUBLE PITCH WITH PERPENDICULAR CURB (LONG SPAN)

1/2 FULL SCALE

- o GLASS, SINGLE GLAZED
- o I-BEAM RAFTER (HL-16)
- o MIN. 4 IN 12 PITCH RECOMMENDED

UNITS REQUIRED

O.D. CURB
(ON SLOPE DIMENSION)

NEOPRENE SETTING BLOCKS AT 1/4 POINTS

.040 ALUM. SETTING BLOCK SUPPORT

#8 X 3/4" LONG HEX HEAD TEK SCREW AT 24" ON CENTER

WEEP HOLES

#12 X 1 1/4" STAINLESS STEEL SHEET METAL SCREW

WEEP HOLES AT RAFTERS & CORNERS (TO LOW SIDE)

HL-35 ALUM. SILL (ALLOY 6063-T5)

FASTENER (BY OTHERS)

MATERIAL AND CONSTRUCTION BY OTHERS

SPECIFY PITCH

MASTIC BEDDING TAPE (BY OTHERS)

1/1

FLAT BAR RAFTER CAP (BEYOND) WITH CAP SCREWS AT 12" O.C. MAX.

FORMED ALUM. "SIMPLE RIDGE" CAP (.040 MIN.) WITH FASTENERS AS REQUIRED


1/8" X 3/8" BUTYL OR FOAM GLAZING TAPE

HL-5 GASKET OR GLAZING TAPE

MODIFIED HL-17

WELD HL-16 AT RIDGE

2/1

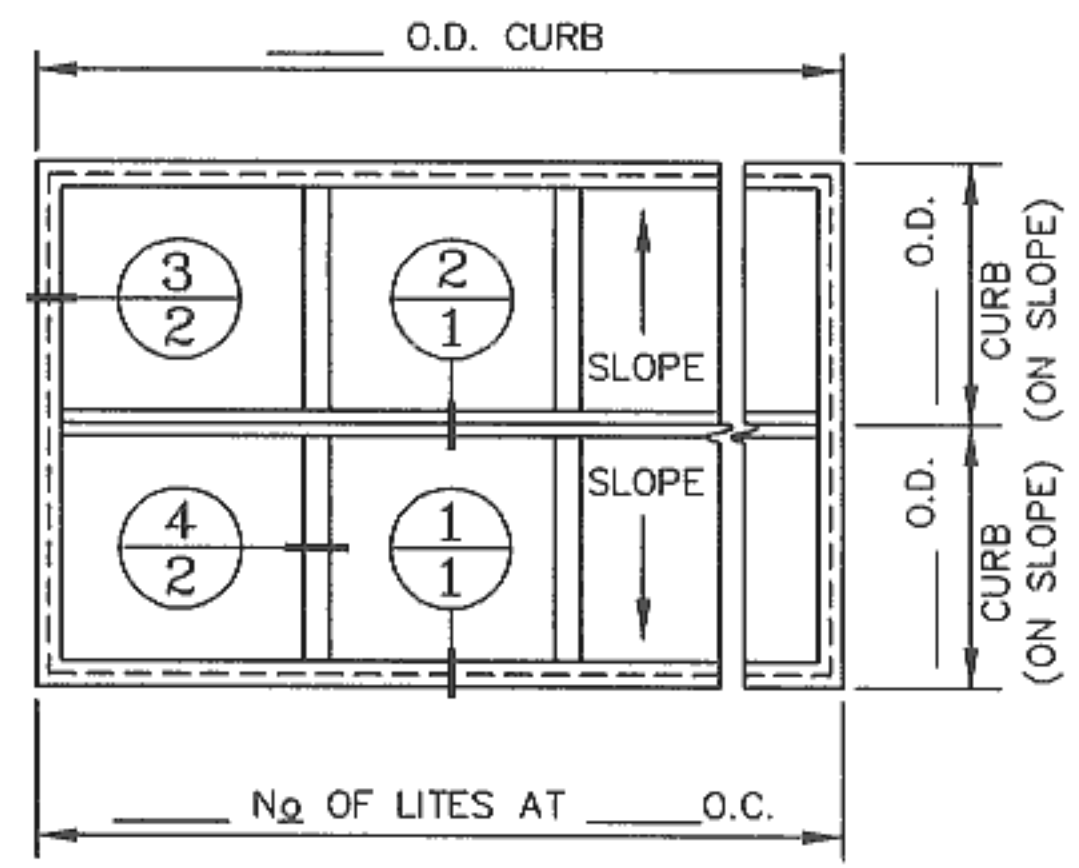

FINISH :	PROJECT :	FILE : HL35DSG7
GLAZING :	CUSTOMER :	REVISIONS
<input type="checkbox"/> FIELD GLAZED <input type="checkbox"/> SHOP GLAZED	FIELD MEASUREMENTS AND INSTALLATION BY _____ ARCHITECT :	

	O'KEEFFE'S, INC. 75 WILLIAMS AVENUE SAN FRANCISCO, CA 94124 TEL.: (415) 822-4222 FAX: (415) 822-5222	DRAWN :	JOB NO.
		DATE :	SHEET : 1 OF 2