

STRUCTURE (BY OTHERS) REQUIRED AT RAFTERS FOR INTERMEDIATE SUPPORT?

YES

NO

LENS SHAPE:


DOME (SHOWN) 20% RISE STANDARD

PYRAMID 30° PITCH STANDARD

DOUBLE HIP 30° PITCH STANDARD

SPECIAL \_\_\_\_\_

② TYPICAL RAFTER  
1/2 FULL SCALE

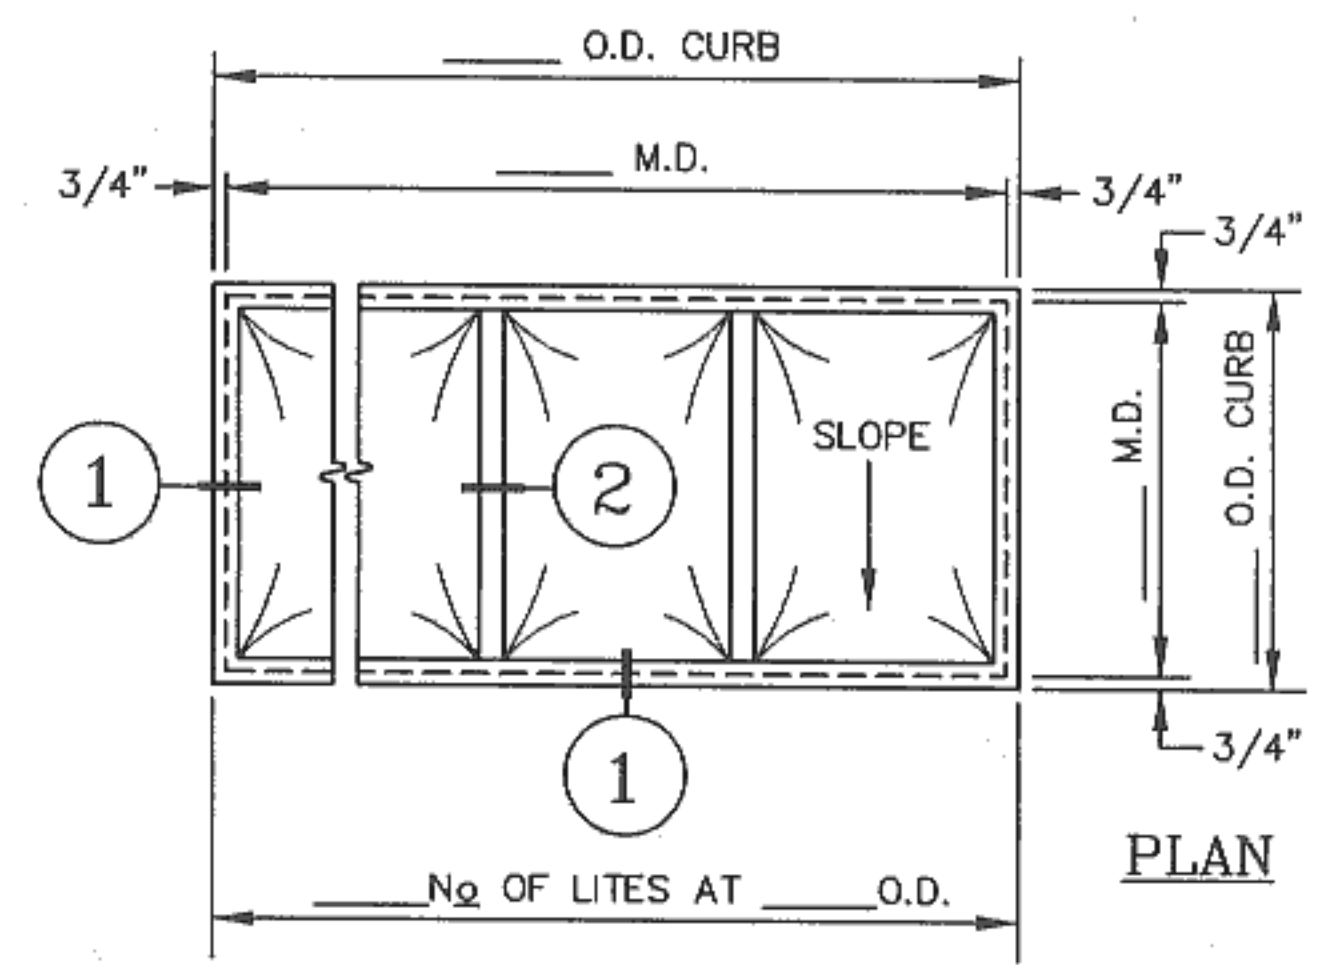

① CURB MOUNTED SILL  
1/2 FULL SCALE

DOMES IN A COMMON FRAME  
(LONG SPAN) 1/2 FULL SCALE

- ACRYLIC, DOUBLE GLAZED
  - CURB MOUNTED
- \_\_\_\_\_ UNITS REQUIRED

FINISH :	PROJECT :	FILE : HL35ADD3
GLAZING :	CUSTOMER :	REVISIONS
<input type="checkbox"/> FIELD GLAZED      FIELD MEASUREMENTS AND INSTALLATION BY _____	ARCHITECT :	
<input type="checkbox"/> SHOP GLAZED		