

LEAN-TO WITH PLUMB CURB (SHORT SPAN)

- o GLASS, INSULATED GLAZED
- o I-BEAM RAFTER (HL-27), SPACED 2'-6" O.C. OR LESS

1/2 FULL SCALE

UNITS REQUIRED

NEOPRENE SETTING BLOCK AT 1/4 POINTS

HL-22 ALUM. CAP MITERED & WELDED AT CORNERS

.040 ALUM. SETTING BLOCK SUPPORT

#8 X 3/4" LONG HEX HEAD TEK SCREW AT 24" O.C.

#12 X 1 1/4" STAINLESS STEEL SHEET METAL SCREW

WEEP HOLES AT RAFTERS & CORNERS (TO LOW SIDE)

WORK POINT

HL-34 ALUM. SILL

FASTENER (BY OTHERS)

MATERIAL AND CONSTRUCTION BY OTHERS

O.D. CURB (ON SLOPE DIMENSION)

FIELD NOTCH AROUND RAFTER CAPS AS REQUIRED (ATTACH WITH #8 PAN HEAD SHEET METAL SCREW OR POP RIVOT TO CAP)

COUNTER FLASHING (BY OTHERS)

.040 ALUM HEAD FLASHING (FIELD NOTCH AT CAPS AN SECURE WITH #8 PAN HEAD SHEET METAL SCREW

C-13 CAP BEYOND

ANCHOR BOLT BY OTHERS

1/8" ALUM. FORMED HEAD

2 LEAN-TO HEAD
1

WORK POINT


SPECIFY PITCH

MASTIC BEDDING TAPE (BY OTHERS)

1 SLOPING SILL
1

PLAN DIMENSION

PLAN

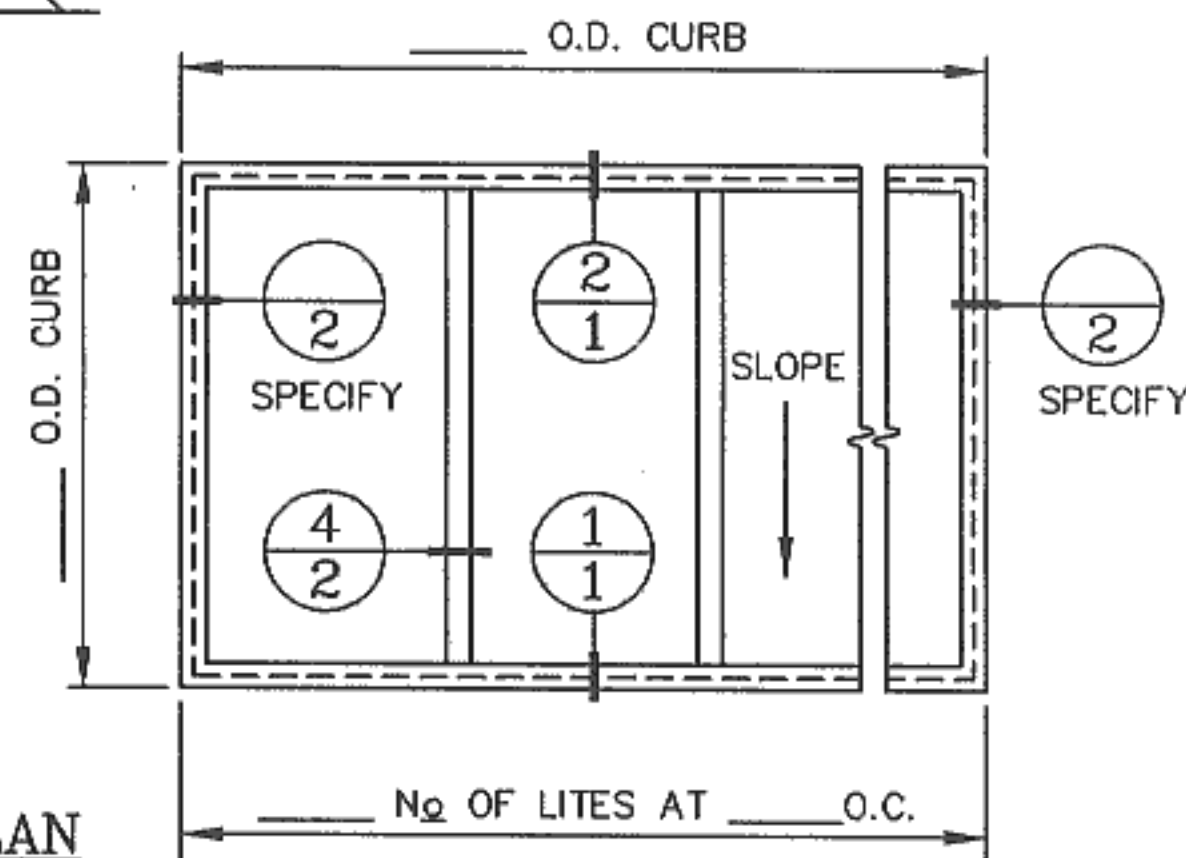

FINISH :

GLAZING :

- FIELD GLAZED
- SHOP GLAZED

FIELD MEASUREMENTS AND INSTALLATION BY _____

PROJECT :

CUSTOMER :

ARCHITECT :

FILE : HLLT01A1

REVISIONS

O'KEEFFE'S, INC.

75 WILLIAMS AVENUE
SAN FRANCISCO, CA 94124
TEL.: (415) 822-4222
FAX: (415) 822-5222

DRAWN :

DATE :

JOB NO.

SHEET :

1 OF 2